


waukesha®



Instructions for Installing LRT200A-2 / LRT200-2 Mechanisms

LRT200 MECHANISM-MANUAL – 3.1

Read and understand this manual prior to operating or servicing the products.

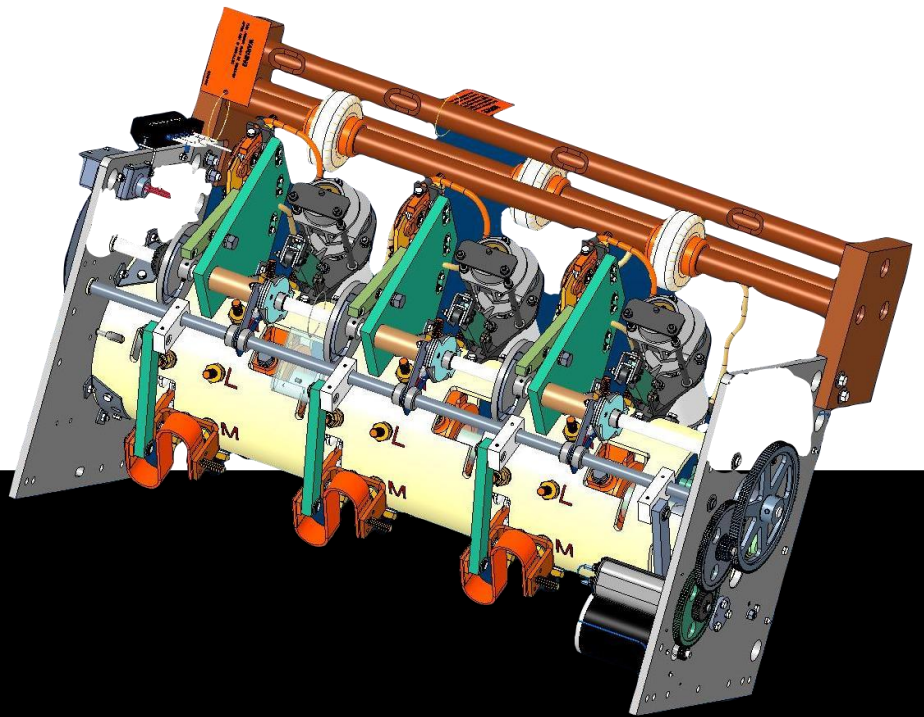

CONTENTS

Initial Check	3-4
Tap lead Connection	3
Interrupter Bottle Pre-travel	3
Interrupter Bottle Pre-travel Adjustment	4
Verify Neutral Position	4
Tank Inspection	4
Position Indicator Check	4
Hand Form Leads (if required)	4
Installation	5-6
Bevel Gear Positioning	5
Correct Lifting Procedure	5
Connection to Position Indicator	5-6
Connecting Tap & Control Leads	6
Hand Cranking	6
Initial Operation	7-9
Verify Electrical Operation	6
Drill & Pin Bevel Gear	6
Verify Vacuum Interrupters	8-9
Verify Bypass Switch	9
Verify Vacuum Interrupter Protective System	9
Verify Vacuum Interrupter Gap	10
Verify Ratios for All Tap Positions	10
Close & Seal the LTC Compartment	10
Fill the LTC Tank with Oil	11
Fill with Oil & Check for Leaks	11
Add N2 Blanket	11
Obtain an Oil Sample	11
Contact Information	12

These instructions cover the details needed to install an LRT200-2, or LRT200A-2 mechanism into an existing LTC tank. After removing from the shipping crate and before installation, the mechanism should be thoroughly inspected for damage that may have occurred during shipping as follows:

1. Tap Lead Connections

- a. If the tap changer was sent in for overhaul / repair with the tap leads, it will be returned with all tap leads installed. Check for loose or damaged parts or hardware. If a tap lead connection is found to be loose, it should be tightened to a torque of 16 – 18 ft-lbs.

2. Interrupter Pre-travel

- a. With the mechanism on position and the interrupter closed, check the vacuum bottle pre-travel by measuring the gap between the drive nut and upper actuator arm on each vacuum interrupter as shown in Fig.1 below. This gap should be .125" +/- .010". This is required to control the opening impact.

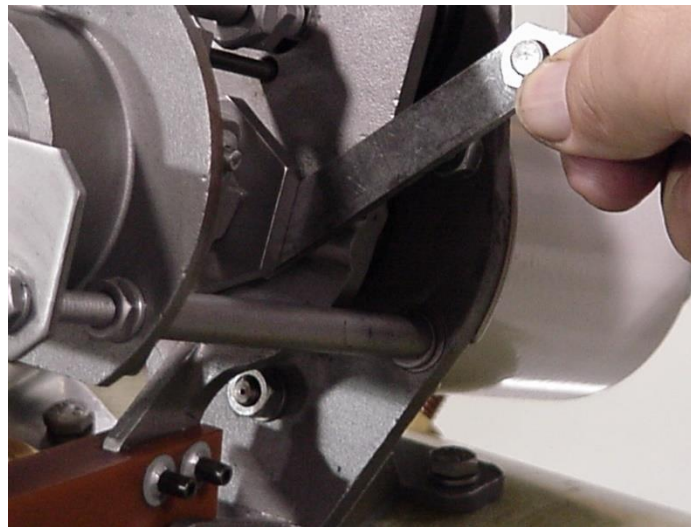


Fig. 1: Checking the interrupter bottle pre-travel

- b. If this is not within the adjustment limits, loosen the locking nut just under the head of the vacuum interrupter adjusting screw, shown in Fig. 2, and turn the screw in the appropriate direction to correct the gap. Make sure to tighten the locking nut after making the needed adjustment.

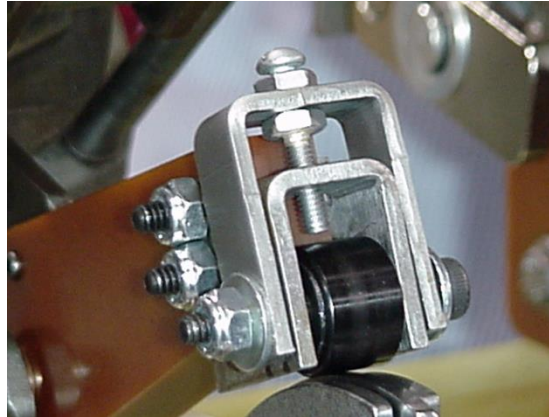


Fig. 2: Vacuum interrupter adjusting screw

3. Verify Neutral Position:

- a. Verify that the mechanism is on the neutral position. Neutral is the position where both sets of moving selector switch contacts are on the “M” tap and the paint match marks on the drive gears inside of the endplates are aligned.

4. Tank Inspection:

- a. Check the LTC tank before installing the mechanism. It should be clean and free from all carbon, dirt, or metallic particles.

5. Position Indicator Check:

- a. Check the position indicator on the LTC tank to insure it is on the neutral position.

Note:

On units with the high amp (wide flat) leads, the leads should be pre-shaped by hand to follow the contour of the main support cylinder prior to installing the mechanism into the tank. This is to insure the leads clear the studs on adjacent taps.

6. Installation:

a. Bevel Gear Positioning:

- 1) The beveled gear on the left end of the control camshaft which mates to the beveled gear on the position indicator shaft has been installed but not pinned to the control camshaft. A bag with a setscrew and a .187" diameter spirol pin has been provided and is attached to the shaft for pinning this gear after installing the mechanism. This is to allow for correct positioning of the beveled gear to insure proper alignment of the position indicator with the mechanism.
- 2) Check to make sure the position indicator is on the neutral position. If it is not; rotate the position indicator gears in the control cabinet using the hand crank until the position indicator hand is on "N" (see Fig. 3).

b. Correct Lifting Procedure:

- 1) Attach ropes or lifting cables through the lifting holes in both endplates. Lift the mechanism and install into the LTC. As the mechanism is being lowered into place make sure the slots in the coupling on the end of the position indicator shaft are aligned with the pin on the shaft in the LTC tank.

c. Connection to Position Indicator:

- 1) With the position indicator shaft coupling properly engaged, and while continuing to lower the mechanism in place, line the slots in the mechanism mounting angles attached to each end plate with the corresponding holes in the bottom of the LTC tank. Secure the mechanism in position using mounting bolts removed when the mechanism was taken out.
- 2) Check that the shoulder at the right end of the control camshaft is against the right endplate. Slide the beveled gear on the control camshaft over to the left until it fully engages the beveled gear on the top of the position indicator shaft. Check to make sure the paint match marks on the gears inside the endplates are still aligned and the position indicator pointer is indicating "on position" (see Fig. 3). Temporarily lock the beveled gear to the control camshaft using the setscrew.



Fig. 3: Paint marks on drive gears match up, position indicator on neutral, and bevel gears meshed with set screw tightened

d. Connecting Tap & Control Leads:

- 1) Attach all the tap leads from the mechanism to the studs in the transition board in the LTC tank. Make sure the tag identifying the lead matches the stud identification marked on the transition board. Tighten the bolts used to connect the leads to a minimum of 20 ft-lbs torque.
- 2) Check all electrical connections for tightness and for clearance between tap leads and from tap leads to other live parts anywhere on the mechanism. The minimum clearance is .312" (5/16").
- 3) Reconnect the control leads to the same locations they were on when the mechanism was removed.

e. Hand Cranking:

- 1) Operate the tap selector with the hand crank and check for binding. Check the auxiliary cams and the dual-slope control cams to insure they move freely and that they hold the outer cams back in each direction so the interrupters receive an impact for opening (see Fig. 5).



Fig.5: Dual-slope and Auxiliary Control Cam Assembly

7. Initial Operation:

a. Verify Electrical Operation:

- 1) Verify the braking relay 84X, functions to provide approximately 1 second of braking current to the drive motor at the end of a tap change sequence. The time delay is not critical within the range of .5 to 2 seconds and is adjustable by means of a knob on the bottom of the 84X relay.
- 2) Verify the mechanism stops on position by checking to see that the paint mark on the gear above the position indicator (located in the position indicator housing) is aligned with its pointer. Verify the position marks on the upper drive gears on the mechanism inside the right hand end plate are aligned with each other. If there is not agreement between sets of marks, the marks on the mechanism gears take precedence in making adjustments. If the mechanism does not stop on position the control cams in the position indicator housing should be adjusted as required to do so.
- 3) Verify that the auxiliary cam followers on the vacuum bottle actuator arm goes into the indent of the auxiliary cams on each phase in both directions.
- 4) Verify the position indicator and operation counter operate properly.
- 5) Verify the limit switches do not stop the mechanism before the final position is reached & that they do not permit initiation of a tap change after it is reached.

b. Drill & Pin the Bevel Gear:

- i. After verifying proper operation and positioning of the LTC using the controls, cover the mechanism behind the beveled gears with a drop cloth and drill a hole through the control camshaft using the hole in the beveled gear as a guide and a .187" diameter drill bit.
 - 1) Pin the beveled gear to the control camshaft using the .187" diameter spirol pin. Remove drop cloth being careful to collect all metal shavings produced from drilling. Vacuum / wipe all remaining shavings and thoroughly inspect mechanism to insure no metallic particles are present.
 - 2) Remove and discard the setscrew used to temporarily hold the beveled gear in position.

c. Verify Vacuum Interrupters:

- 1) Check integrity of vacuum interrupters as follows:
- 2) Operate the mechanism manually while carefully observing movement of the wear indicator pin and all components of the actuator assembly.
- 3) The wear indicator pin should travel approximately .1” when vacuum interrupter goes from closed to open and back. If it does not, and the actuator assembly is working properly, indications are that the interrupter has lost its vacuum and needs replacement.
- 4) Complete loss of vacuum can be verified by making a continuity test as follows. Turn the hand crank until the interrupters open. Connect the leads from a low voltage continuity tester across the contacts of the interrupter and operate the closing mechanism by compressing the actuator spring by hand. If the interrupter has lost vacuum the contacts will not close and the continuity tester will show the interrupter is open.
- 5) Minor leaks can be detected by performing a “hi-pot” test on each interrupter. This is done as follows:
 - Open the control power circuit breaker 8M.
 - Use the hand crank to run the mechanism until the interrupters are open.
 - Disconnect the cable lead from the moveable contact rod (top end) at the point where it is attached to the by-pass switch.
 - Separate the cable from the connector by at least 2” and connect the “hot” test lead to the cable.
 - Connect the “ground” test lead to the stationary contact either at the bottom end of the interrupter or at the point where its cable lead is attached to the by-pass switch. Note, if the hi-pot equipment has a center grounded tap, both ends of the interrupter must be disconnected from the by-pass switch before testing.
 - Apply a 10KV ac (or 14KV dc) hi-pot test voltage across the interrupter for one minute. Any signs of breakdown indicates a loss of vacuum signaling the need for replacement.

- Since external leakage current can result from surface contamination of the interrupter housing, some discretion is required when interpreting the hi-pot test results. Leakage currents up to 250 micro-amps are considered acceptable. Above that level warrants further testing. Make note of the voltage level at which the leakage current starts to increase and the approximate change in current for a 10% change in the voltage applied. If the current change is several times the voltage change it is probably due to breakdown of the internal gap between the contacts of the interrupter. This can be further verified by placing a .02" to .03" spacer between the actuator arm and the drive nut on the interrupter mechanism to increase the contact gap and repeating the hi-pot test. If there is internal breakdown, this should increase the potential at which the leakage current starts to flow. No change in current / voltage characteristics will indicate the leakage current is due to surface contamination. In this case, the interrupter should be thoroughly wiped down with a lint free cloth and re-tested. If internal leakage current is seen and a .03" spacer does not reduce the current to below 50 micro-amps the interrupter should be replaced.

d. Verify Bypass Switch:

- 1) Verify operation of the by-pass switches. With the mechanism on an operating position, verify that the stationary contacts balls are resting on the flat of the moving contact blade. Rotate the mechanism off position until the blade stops moving and check that the minimum gap between the end of the blade and its associated stationary contact assembly is .25" on all three phases. Continue to rotate until the opposite end of the by-pass blade can be checked in the same way.

e. Verify Vacuum Interrupter Protective System:

- 1) Check the operation of the vacuum interrupter protective system by pressing and holding down the S2 switch in the TEST position while attempting to change taps in the raise direction by means of the control switch CST. The mechanism should run in the raise direction only long enough to open the interrupters and switch S3P. It should stop before the tap selector opens, reverse itself and run back to the position it was on. At this point, the red FAULT light should turn on and the controls should be locked out. Check the integrity of the lockout mechanism by attempting to operate the mechanism manually in either direction using control switch CST. No further movement should take place.

After completing this test, press the reset switch S1P and repeat the test for the lower direction.

f. Verify Vacuum Interrupter Gap:

- 1) Recheck the gap between the drive nut and upper actuator arms again on each vacuum interrupter assembly as outlined in step 3 of these instructions.

g. Verify Ratios for all Tap Positions:

- 1) Use a TTR (turn- to –turn ratio tester) to verify the ratios for all tap positions as compared to the nameplate on the transformer and insure all tap lead connections are correct.

h. Close & Seal the LTC Compartment:

- 1) Close the LTC compartment and seal by bolting access door in place.

Note: Since the Waukesha LRT200-2, and LRT200A-2 units have been redesigned and upgraded with non-water absorbing insulation materials, it is not necessary that the tap changer tank be filled under vacuum. However, a pressure test of the tank is recommended to insure no tank leaks exist.

⚠ CAUTION

In the event of processing the oil in the main tank, it is recommended that an equivalent vacuum be pulled on the main tank and the LTC tank at the same time while performing the oil filling operation. This will insure the seals on the LTC transition board do not rupture causing oil to leak from the main tank into the LTC tank during normal operation.

8. Fill the LTC tank as follows:

a. Fill with Oil & Check for Leaks:

- 1) Test the LTC tank oil to be used for dielectric breakdown >30 kv , per ASTM D1816 with 2mm gap.
- 2) Fill the LTC tank with clean dry oil to the 25 C level with the tank vented. Operate the LTC 5-6 times in both directions to dislodge any trapped air bubbles and insure the vacuum interrupter dashpots are full of oil.
- 3) Remove the Pressure / Vacuum Relief device and Pressure gauge from the LTC tank and replace them with pipe plugs.
- 4) Seal the tank and pressurize with 5 pounds positive pressure of dry nitrogen and hold for 4 hours, checking for loss of pressure. If pressure drop detected, test for leaks and repair as needed and re-run pressure test.

b. Add N2 Blanket:

- 1) Vent tank to atmospheric pressure and re-install the pressure vacuum bleeder and pressure vacuum gauge. Top off the LTC tank with 2 pounds positive pressure of dry nitrogen

c. Obtain an Oil Sample:

- 1) Obtain a new oil sample for establishing a benchmark for dissolved gas analysis and allow the unit to stand for at least one hour before energizing.

REPLACEMENT PARTS AND SERVICE

Please contact your local sales representative or authorized distributor for replacement parts and/or service, or visit us online at www.waukeshacomponents.com.

For technical support, call us at 800-338-5526.